



alston floors

ALSTON FLOORS PVT. LTD.







MESA CARPET PLANK



MESA RED

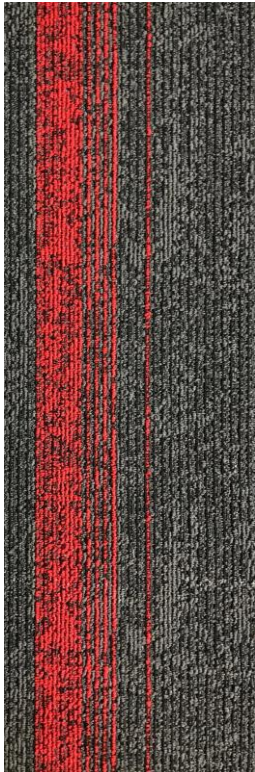

C

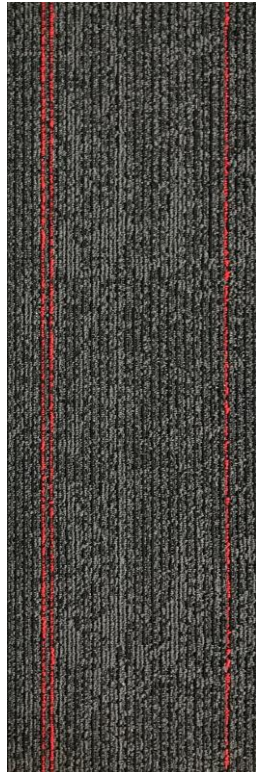


B



A



MESA GREEN

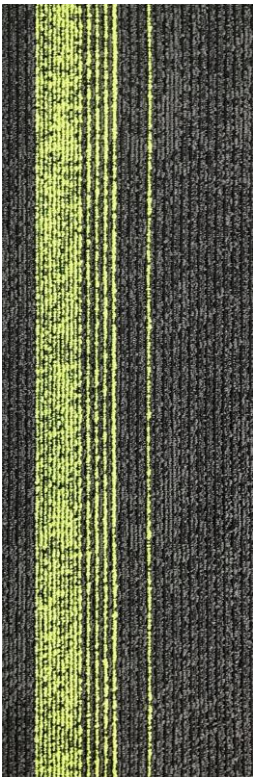

C



B




A



MESA BLUE



C

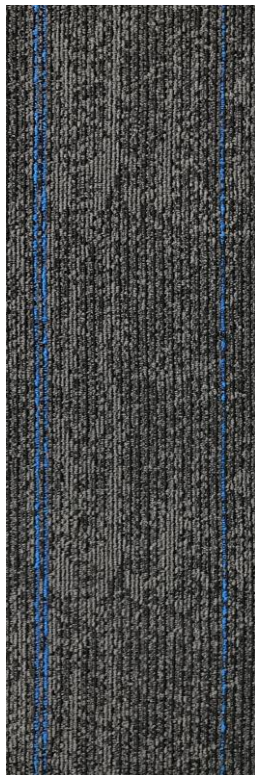


B




A




MESA BLUE
LIGHT GREY

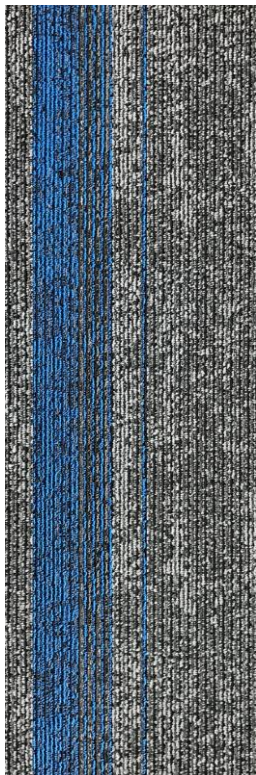

C

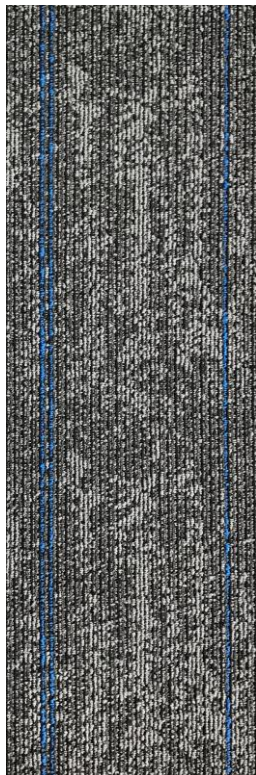

B

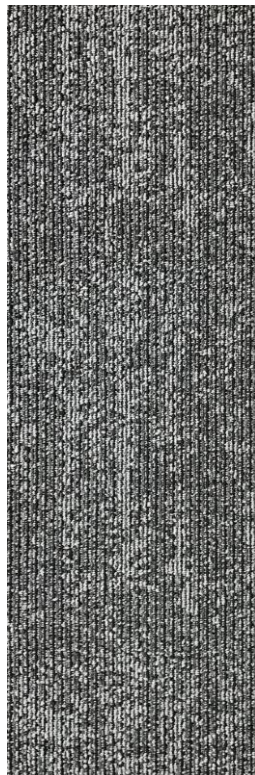


A

SPECIFICATIONS

Product	MESA
Construction	Modulated LOOP PILE
Yarn	Polypropylene B.C.F. UV Treated
Gauge	1/12
Pile weight	800 GSM
Pile Height	4 mm - 6 mm
Primary Backing	Non Woven
Secondary Backing	Modified Bitumen E-BACK
Tile Size	25 CM x 100 CM
Area of Use	Heavy Commercial
Smoke Density Test (NIST)	ASTME 662-06
Fire Class	ASTMD 2859/CPSC FF 1-70 Flammability Test ASTMR 648 Radiant Panel Test
Static Control	AATCC - 175 Stain Resistance

INSTALLATION INSTRUCTION

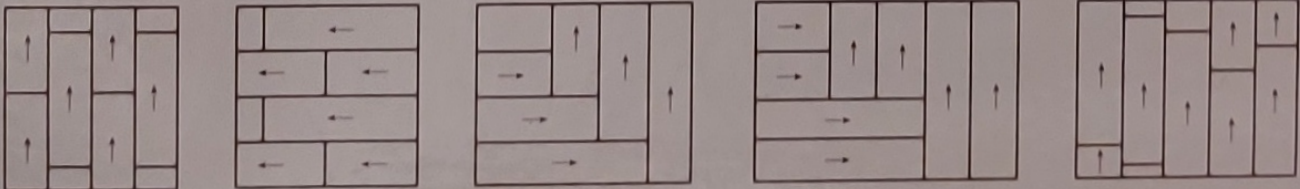






Downtown M14


Specifications

Product	M-14 DOWNTOWN	HIGH STREET
CONSTRUCTION	MULTI-LEVEL LOOP	LEVEL LOOP
YARN	PPB,C,F, UV TREATED	PPB,C,F, UV TREATED
GALGE	1/12	1/10
PILE WEIGHT	650 GSM	600 GSM
PILE HEIGHT	4 MM - 8 MM	5 MM
PRIMARY BACKING	NON WOVEN	NON WOVEN
SECONDARY BACKING	MODIFIED BITUMEN E-BACK	MODIFIED BITUMEN E-BACK
TILE SIZE	50 CM X 50 CM	50 CM X 50 CM
AREA OF USE	HEAVY COMMERCIAL	HEAVY COMMERCIAL
SMOKE DENSITY TEST (NIST)	ASTM E 882-06	ASTM E 882-06
FIRE CLASS	ASTM D 2858 / CPSC FF 170 FLAMMABILITY TEST ASTM E 848 RADIANT PANEL TEST	ASTM D 2858 / CPSC FF 170 FLAMMABILITY TEST ASTM E 848 RADIANT PANEL TEST
Static Control	AATCC - 175 STAIN RESISTANCE	AATCC - 175 STAIN RESISTANCE

Installation Instruction

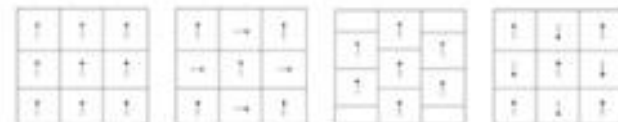

www.floormaster.com



M14 - 11920



M14 - 11921



M14 - 11922




M14 - 11923




M14 - 11960




M14 - 11970



M14 - 11971



M14 - 11980

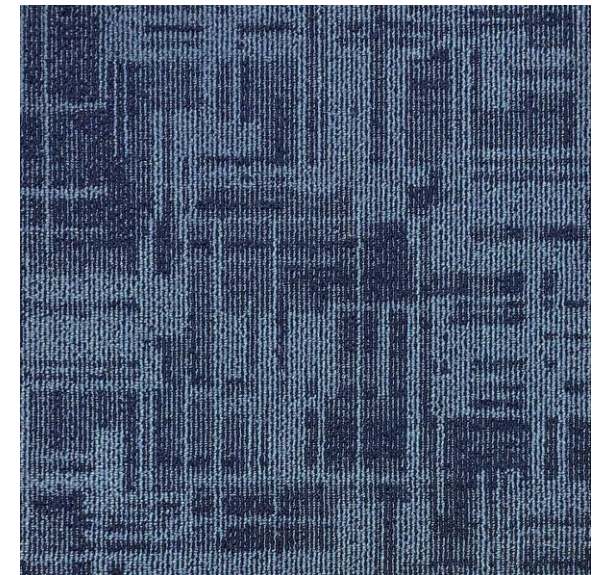

M14 - 11921

SPECIFICATION

Construction : Modulated Loop Pile

Yarn Type : Nylon

Gauge : 1/12


Pile Weight : 650 gsm

Pile Height : 4-6 mm.


Primary Backing : Non-Woven

Secondary Backing : E- Backing

Size : 50 X 50 cm

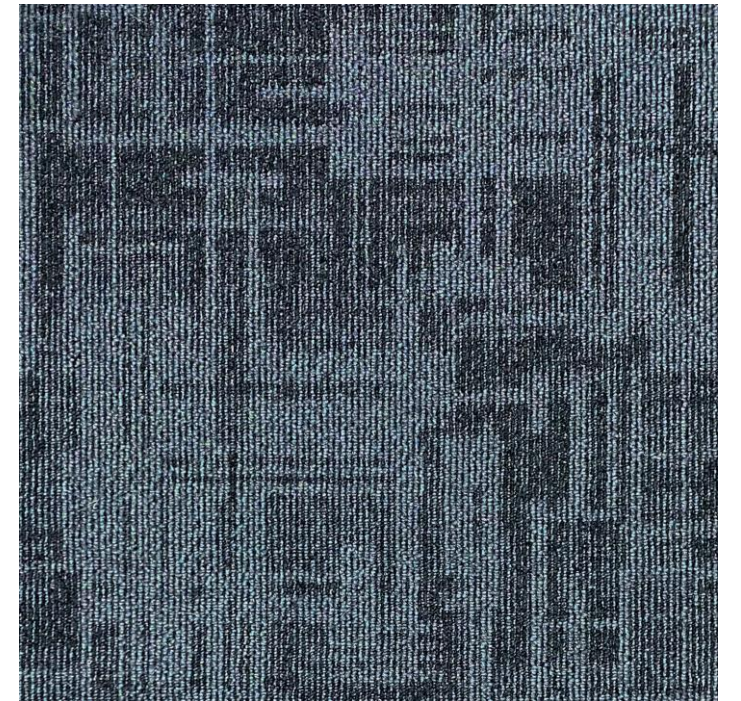

M14 - 11923

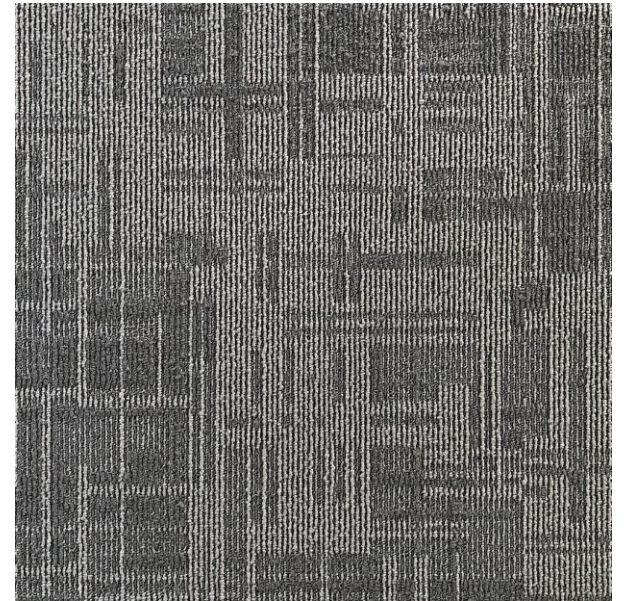

M14 - 11970




High Street Series

Specifications


Product	M-14 DOWNTOWN	HIGH STREET
CONSTRUCTION	MULTI-LEVEL LOOP	LEVEL LOOP
YARN	P.P.B.C.F. UV TREATED	P.P.B.C.F. UV TREATED
GALGE	1/12	1/10
PILE WEIGHT	650 GSM	800 GSM
PILE HEIGHT	4 MM - 8 MM	5 MM
PRIMARY BACKING	NON WOVEN	NON WOVEN
SECONDARY BACKING	MODIFIED BITUMEN E-BACK	MODIFIED BITUMEN E-BACK
TILE SIZE	50 CM X 50 CM	50 CM X 50 CM
AREA OF USE	HEAVY COMMERCIAL	HEAVY COMMERCIAL
SMOKE DENSITY TEST (NIST)	ASTM E 882-06	ASTM E 882-06
FIRE CLASS	ASTM D 2858 / CPSC FF 170 FLAMMABILITY TEST ASTM D 848 RADIANT PANEL TEST	ASTM D 2858 / CPSC FF 170 FLAMMABILITY TEST ASTM D 848 RADIANT PANEL TEST
Static Control	AATCC - 175 STAIN RESISTANCE	AATCC - 175 STAIN RESISTANCE

Installation Instruction

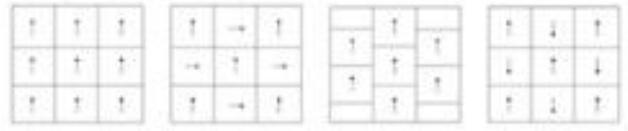



TL - 12720

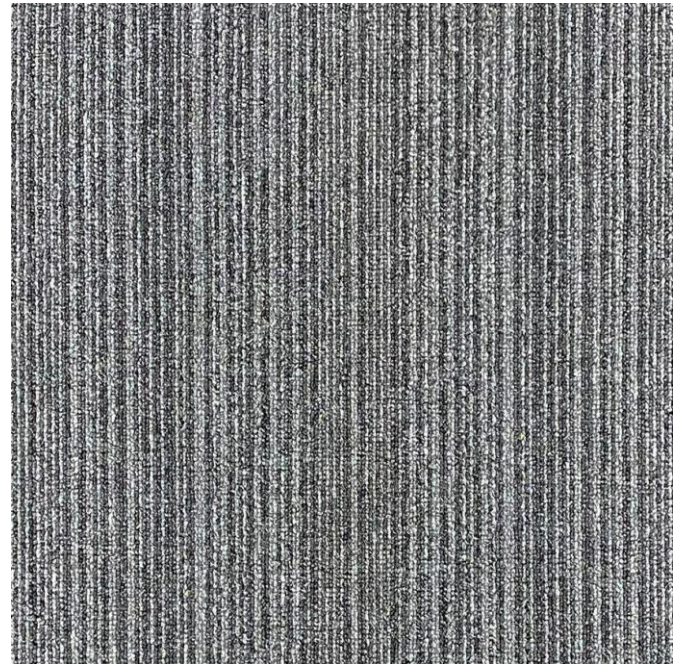

TL - 12771




TL - 12760

CONTACT US

ALSTON FLOORS PVT. LTD.

Door no. 12/421, GAIL - HMT Colony Road
Behind KINFRA Substation, Kalamassery,
Kochi, Kerala - 683503.

 **+91 98957 72087**

 **mail@alstonfloors.com**

 **www.alstonfloors.com**

